

CP632 6V 3.2Ah(20hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction

| | | | | | | | | |
|--------------|----------------|----------------|-----------|-------|--------------|----------|------------|---------------|
| Component | Positive plate | Negative plate | Container | Cover | Safety valve | Terminal | Separator | Electrolyte |
| Raw material | Lead dioxide | Lead | ABS | ABS | Rubber | Copper | Fiberglass | Sulfuric acid |

General Features

- ⦿ Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- ⦿ Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- ⦿ UL-recognized component.
- ⦿ Can be mounted in any orientation.
- ⦿ Computer designed lead, calcium tin alloy grid for high power density.
- ⦿ Long service life, float or cyclic applications.
- ⦿ Maintenance-free operation.
- ⦿ Low self discharge.
- ⦿ Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

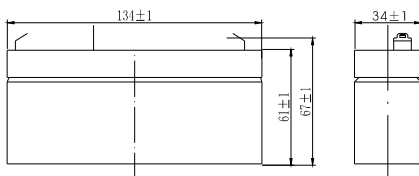

Performance Characteristics

| | | | | |
|-------------------------------|---|--------------------|-------------------|------------------|
| Battery model | CP632 | | | |
| Nominal voltage | 6V | | | |
| Number of cell | 3 | | | |
| Capacity (25°C) | 20hR(0.16A, 5.25V) | 10hR(0.31A, 5.25V) | 5hR(0.57A, 5.25V) | 1hR(2.1A, 4.80V) |
| | 3.2Ah | 3.1Ah | 2.85Ah | 2.1Ah |
| Dimensions | Length | Width | Height | Total Height |
| | 134±1mm | 34±1mm | 61±1mm | 67±1mm |
| Approx. weight | 0.65Kg (1.43 lbs) | | | |
| Internal resistance | Full charged at 25°C: ≤ 30mOhms | | | |
| Self discharge | 3% of capacity declined per month at 20°C (average) | | | |
| Operating temperature range | Discharge | Charge | Storage | |
| | -20~60°C | -10~60°C | -20~60°C | |
| Max. discharge current (25°C) | 48A (5s) | | | |
| Short circuit current | 160A | | | |









Discharge Constant Current (Amperes at 77°F25°C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 1h | 3h | 5h | 10h | 20h |
|----------------------|------|-------|-------|-------|------|------|------|------|------|
| 1.60V | 13.0 | 8.80 | 6.10 | 3.70 | 2.10 | 0.89 | 0.62 | 0.33 | 0.17 |
| 1.65V | 12.3 | 8.38 | 5.83 | 3.55 | 2.02 | 0.86 | 0.60 | 0.32 | 0.16 |
| 1.70V | 11.6 | 7.94 | 5.55 | 3.40 | 1.94 | 0.83 | 0.59 | 0.32 | 0.16 |
| 1.75V | 10.9 | 7.50 | 5.26 | 3.23 | 1.86 | 0.80 | 0.57 | 0.31 | 0.16 |
| 1.80V | 10.2 | 7.05 | 4.97 | 3.06 | 1.77 | 0.76 | 0.55 | 0.30 | 0.16 |

Discharge Constant Power (Watts at 77°F25°C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 45min | 1h | 2h | 3h | 5h |
|----------------------|------|-------|-------|-------|-------|------|------|------|------|
| 1.60V | 23.0 | 15.3 | 11.80 | 7.17 | 5.33 | 4.10 | 2.42 | 1.81 | 1.24 |
| 1.65V | 21.6 | 14.4 | 11.20 | 6.81 | 5.09 | 3.93 | 2.35 | 1.77 | 1.22 |
| 1.70V | 20.2 | 13.6 | 10.60 | 6.44 | 4.83 | 3.75 | 2.27 | 1.72 | 1.19 |
| 1.75V | 18.7 | 12.7 | 9.89 | 6.07 | 4.57 | 3.56 | 2.18 | 1.67 | 1.17 |
| 1.80V | 17.4 | 11.8 | 9.24 | 5.69 | 4.31 | 3.37 | 2.08 | 1.61 | 1.14 |

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values. All data shall be changed without notice,LUXURY reserves the right to explain and update the information contained hereinto.

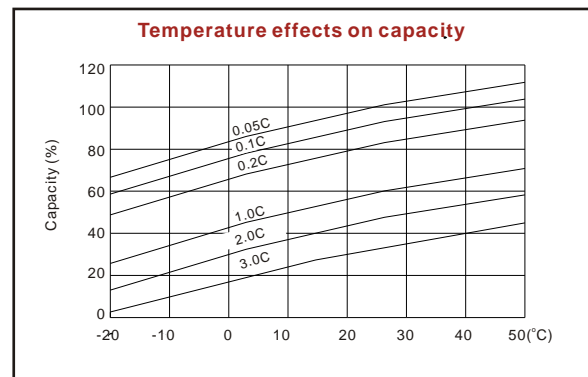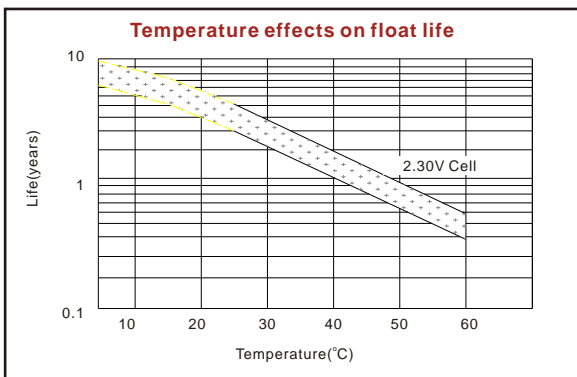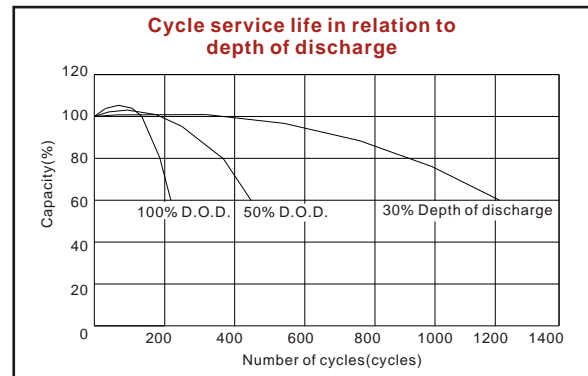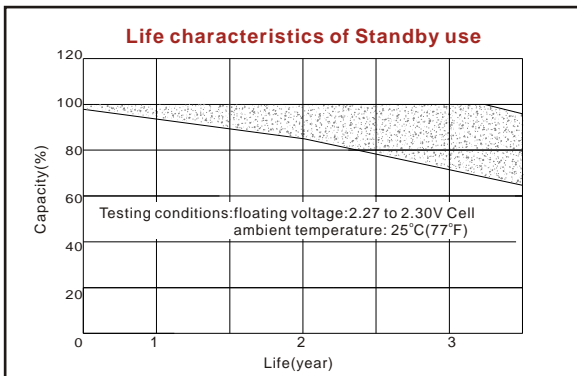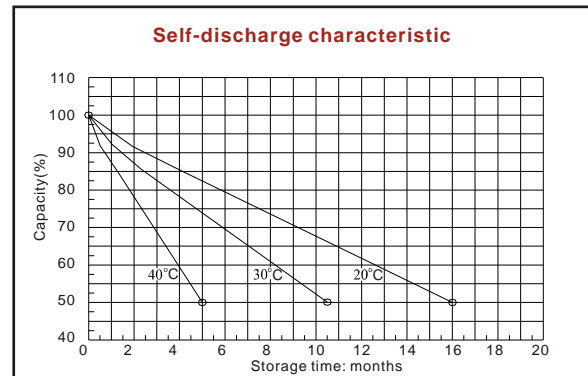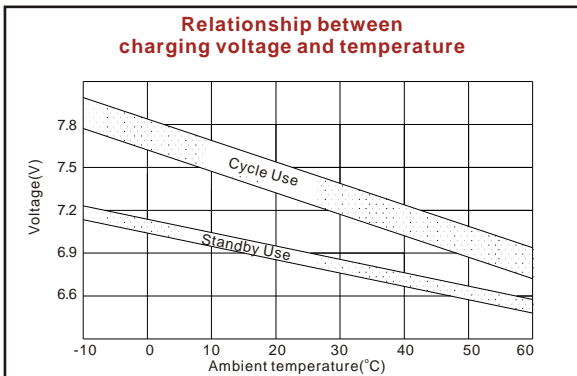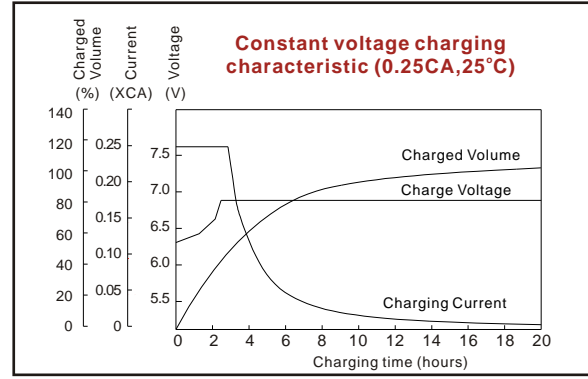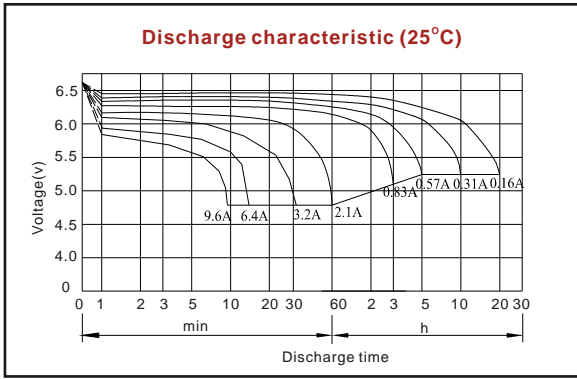



ISO9001:2008



MH25860



G4M19906-9202-E-16



E-mail: sales@luxury-system.com
 Website: <http://www.luxury-system.com>

LUXURY SYSTEM . CO ., LTD